

Installing Intellicus on Mac

Version: 16.0

intellicus

Copyright © 2017 Intellicus Technologies

This document and its content is copyrighted material of Intellicus Technologies.

The content may not be copied or derived from, through any means, in parts or in whole, without a prior written permission from Intellicus Technologies. All other product names are believed to be registered trademarks of the respective companies.

Dated: June 2017

Acknowledgements

Intellicus acknowledges using of third-party libraries to extend support to the functionalities that they provide.

For details, visit: <http://www.intellicus.com/acknowledgements.htm>

Contents

| | |
|--------------------------------|----|
| 1 Installing Intellicus on Mac | 4 |
| System Pre-requisites | 4 |
| Installing the product | 4 |
| Starting Intellicus | 7 |
| Stopping Intellicus | 10 |
| Uninstalling Intellicus | 11 |

1 Installing Intellicus on Mac

Intellicus is an easy-to-use Business Intelligence platform that enables self-serve and intuitive information analysis. It thus empowers business users to turn insights into effective decisions.

You can start using Intellicus with quick and easy installation process. This document walks you through the steps of pre-installation, installation, post-installation and uninstallation required for Intellicus.

Instructions for installation and running Intellicus on Mac are organized into the following sections:

- Installing the product.
- Starting the Intellicus Report Server.
- Starting the Intellicus Web Server.
- Starting the Intellicus suite in browser.
- Stopping the Intellicus Report Server.
- Stopping the Intellicus Web Server.
- Uninstalling the product.

System Pre-requisites

- **Memory:** minimum 4 GB of RAM or more.
- **Storage Space:** minimum 2 GB or more.
- **Internet Browser:** Safari 9.2 or a higher version.

Important: To be able to install Intellicus, you are required to have administrative privileges on the machine.

Installing the product

You can follow the below mentioned steps to install the product:

Copy the setup of Intellicus (*Intellicus<version>_mac64.dmg* file) on the target machine where Intellicus is to be installed.

Note: If Intellicus is already installed on your machine, make sure you stop both the Report Server and Web Server.

Unzip the *Intellicus<version>_mac64.dmg* file to get *Intellicus.mpkg*. Execute this file by either double-clicking or choosing to 'Run as administrator' on right-clicking the file. This would then begin to install Intellicus as shown in the steps below.

1. The 'Introduction' screen appears as shown in Figure 1.

Click "Continue".

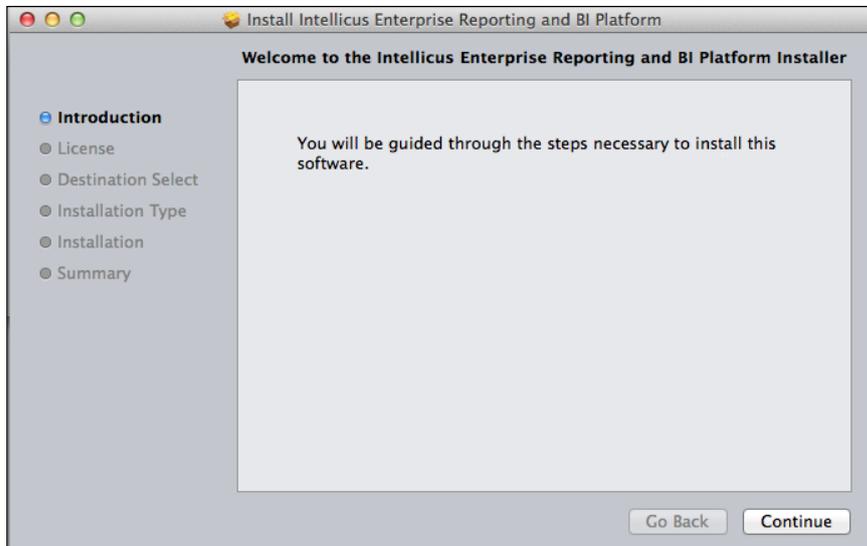


Figure 1: Intellicus Introduction Screen

2. Click "Continue" on the 'License' screen.

Click to agree after reading the license on the screen that pop-ups.

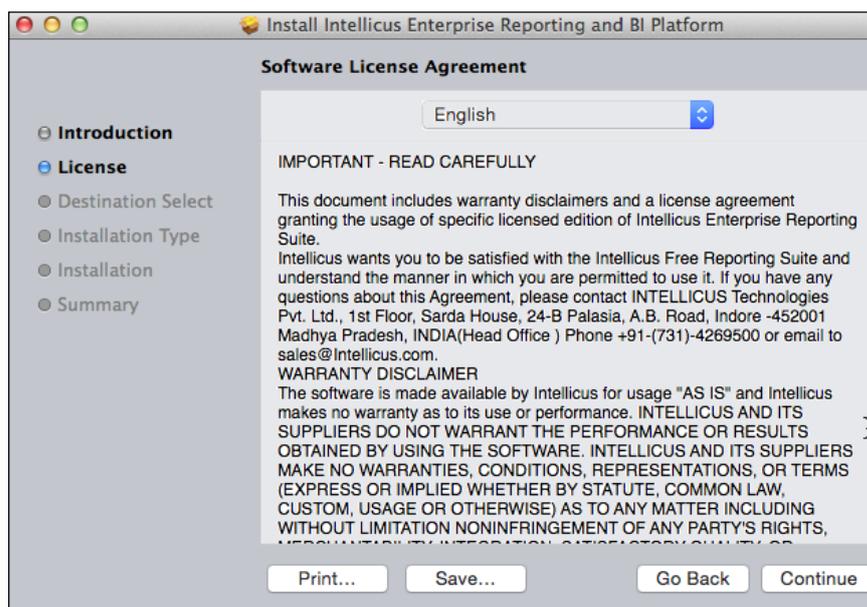


Figure 2: Intellicus License Screen

3. Click “Install” on the ‘Installation Type’ screen.

You can also select to choose a disk drive upon clicking “Change Install Location”.

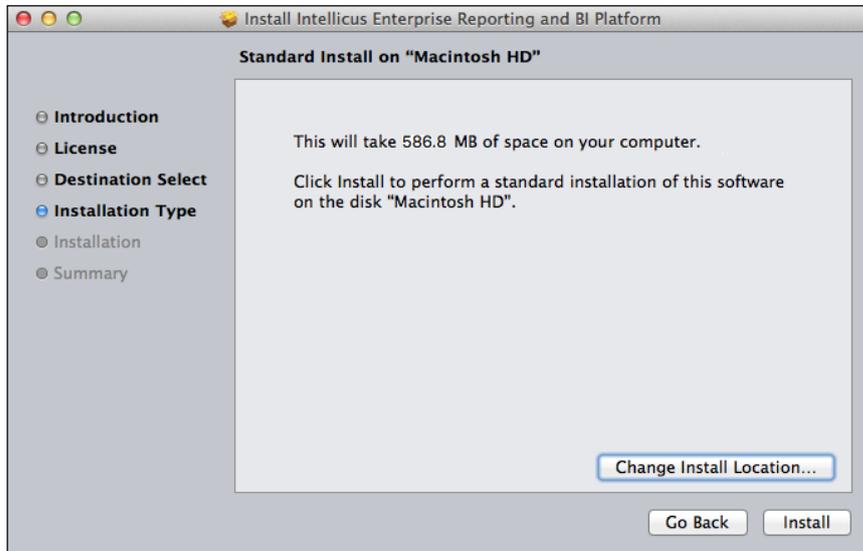


Figure 3: Intellicus Installation Type Screen

4. Enter administrator’s Name and Password.

Click “Install Software” to complete the installation.



Figure 4: Intellicus Install Software Screen

5. The underneath screen shows the successful installation.

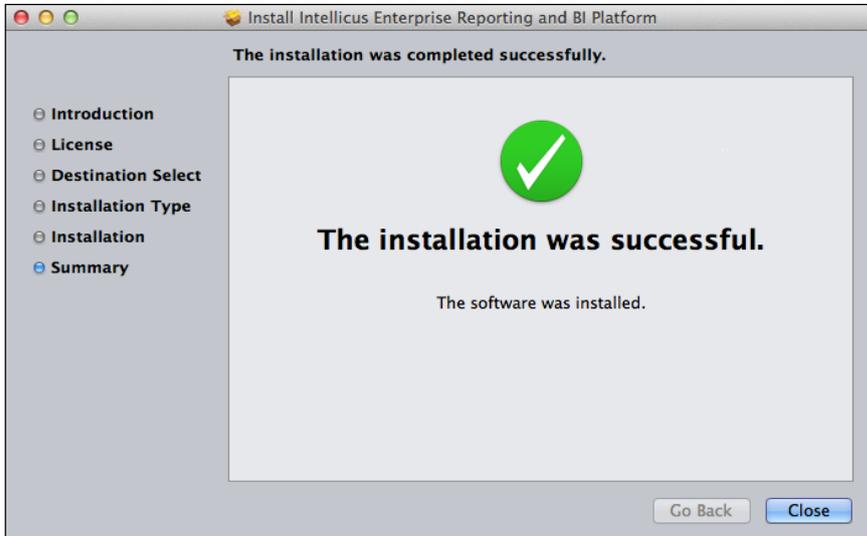


Figure 5: Intellicus Install Summary Screen

Starting Intellicus

You can follow the below mentioned steps to start the Report Server and Web Server:

To Start the Report Server and Web Server

Intellicus provides a script (intellicus.sh) which helps to launch, stop and monitor the application. This script is located at /Applications/Intellicus<version>.

It expects a user input to perform the appropriate action given below:

- start : to start the report server and web server
 - stop : to stop the report server and web server
 - status : to provide the status of report server and web server
1. To launch the application run the **intellicus.sh** script file with **start** as user input

```
./intellicus.sh start
```

```
1921683385Builds:Intellicus16.0 ImpAdmin$ ls
APIs Acknowledgements SampleCodes docs intellicus.sh jakarta jre reportengine reportserver.sh webservice.sh
1921683385Builds:Intellicus16.0 ImpAdmin$ ./intellicus.sh start
```

Figure 6: Starting Intellicus

It will launch the Intellicus report server and web server with a success message stating “Designers can start now”.

2. To monitor the application run the **intellicus.sh** script file with **status** as user input

```
./intellicus.sh status
```

It will return the status of Intellicus report server and web server.

```
1921683385Builds:Intellicus16.0 ImpAdmin$ ./intellicus.sh status
iEngine (pid 1965) is running...
java (pid 1993) is running...
1921683385Builds:Intellicus16.0 ImpAdmin$
1921683385Builds:Intellicus16.0 ImpAdmin$ █
```

Figure 7: Get Status of Intellicus Report and Web Servers

To Start the Report Server Only

Intellicus provides a script (reportserver.sh) which enables to launch, stop and monitor the Intellicus report server. This script is located at /Applications/Intellicus<version>.

It expects a user input to perform the appropriate action given below:

- start : to start the report server
 - stop : to stop the report server
 - status : to provide the status of report server
1. To launch the report server run the **reportserver.sh** script file with **start** as user input

```
./reportserver.sh start
```

2. To monitor the report server run the **reportserver.sh** script file with **status** as user input

```
./reportserver.sh status
```

You can also follow the below mentioned steps to start the Report Server:

To start the Report Server, run the file 'run.sh' located in the '/Applications/Intellicus<version>/reportengine/bin' folder.

```
./run.sh
```

To Start the Web Server Only

You can follow the below mentioned steps to start the Web Server only:

Intellicus provide a script (webserver.sh) which enables to launch, stop and monitor the Intellicus web server. This script is located at /Applications/Intellicus<version>.

It expects a user input to perform the appropriate action

- start : to start the web server
- stop : to stop the web server
- status : to provide the status of web server

1. To launch the web server run the **webserver.sh** script file with **start** as user input
`./webserver.sh start`
2. To monitor the web server run the **webserver.sh** script file with **status** as user input
`./webserver.sh status`

You can also follow the below mentioned steps to start the Web Server only:

To start the Intellicus Web server, run the file 'startup.sh' located in the '/Applications/Intellicus<version>/jakarta/bin' folder.

`./startup.sh`

To Start Intellicus Web Reporting suite

1. Open the browser.
2. In address bar, specify the following URL:

`http://<IP of the webserver>/intellicus`

For example, `http://120.98.99.256/intellicus`

If user has changed the default Web Server port, specify the following URL:

`http://<IP of the webserver:port number>/intellicus`

For example, if the changed port number is 7000, the URL would be:

`http://120.98.99.256:7000/intellicus`

The login page appears as shown in Figure 8.

THE POWER
TO UNDERSTAND
YOUR BUSINESS

www.intellicus.com | info@intellicus.com

SIGN IN

User Name:

Password:

MORE OPTION

- Administrator
- Designer
- End User

© 2003-16 Intellicus Technologies

Figure 8: Login details

Stopping Intellicus

To Stop the Report Server and Web Server

You can follow the below mentioned steps to stop the Report Server and Web Server:

To stop the application run the **intellicus.sh** script file with **stop** as user input. This file is available in /Applications/Intellicus<version> folder.

```
./intellicus.sh stop
```

```

1921683385Builds:Intellicus16.1 ImpAdmin$ ./intellicus.sh stop
*****Using class Path *****
.
Using CATALINA_BASE:  /Applications/Intellicus16.0/jakarta
Using CATALINA_HOME:  /Applications/Intellicus16.0/jakarta
Using CATALINA_TMPDIR: /Applications/Intellicus16.0/jakarta/temp
Using JRE_HOME:       ../../jre/jre
Using CLASSPATH:      /Applications/Intellicus16.1/jakarta/bin/bootstrap.jar:/Applications/Intellicus16.1/jakarta/bin/tomcat-juli.jar
Got shutdown request...
1921683385Builds:Intellicus16.1 ImpAdmin$ Exit code 0

```

Figure 9: Stopping Intellicus

It will stop the Intellicus report engine and web server.

To Stop the Report Server

To stop the report server run the reportserver.sh script file with stop as user input. This file is available in /Applications/Intellicus<version> folder.

```
./reportserver.sh stop
```

You can also follow the below mentioned steps to stop the Report Server:

Run the file shutdown.sh. This file is available in /Applications/Intellicus<version>/reportengine/bin folder.

```
./shutdown.sh
```

To Stop the Web Server

To stop the web server run the webserver.sh script file with stop as user input. This file is available in /Applications/Intellicus<version> folder.

```
./webserver.sh stop
```

You can also follow the below mentioned steps to stop the Web Server:

Run the file shutdown.sh. This file is located in the /Applications/Intellicus<version>/jakarta/bin folder.

```
./shutdown.sh
```

Uninstalling Intellicus

Before uninstalling Intellicus, you need to stop the Report Server and Web Server as explained in the previous section.

To uninstall, delete the /Applications/Intellicus<version> folder under the installed disk drive.